


FC SWING DOWN CEILING TILE

Material: aluminum or galvanized steel

Surface treatment: powder coating or pre-painted


Thickness: 0.4-1.2mm

Color: RAL color and wooden grain colors are available for choice
Plain and perforated tile are optional, for perforated tiles with black felt, sound absorption, for more patterns please refer to P10-P12

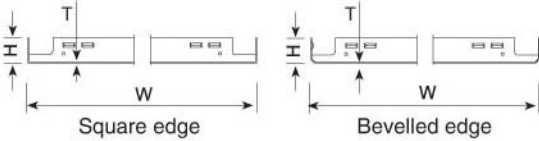

FC SWING DOWN CEILING TILE Unit:mm

Item No.	WidthXLength	Thickness	Height
FC01	300x300	0.4-0.8	19 / 25
FC02	400x400		
FC03	500x500		
FC04	300x600	0.5-1.0	
FC05	600x600	0.6-1.2	
FC06	300x1200		
FC07	600x1200		

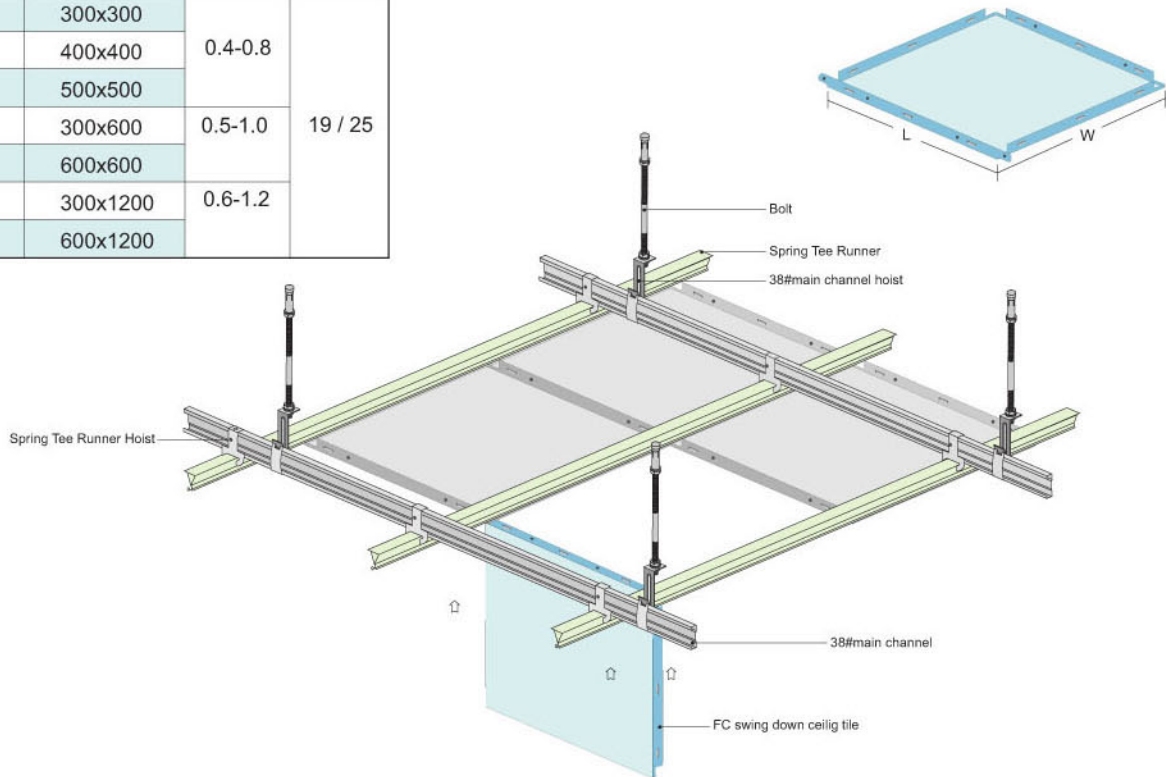

Structure and installation of FC swing down ceiling

<p>SPRING TEE RUNNER Material: steel Surface treatment: galvanized steel Width: 33mm Length: 3000mm or on request Thickness: 0.35mm</p>	<p>SPRING TEE RUNNER HOIST B Material: steel Surface treatment: galvanized steel Height: 42mm Thickness: 0.6mm</p>	<p>SPRING TEE RUNNER HOIST A Material: steel Surface treatment: galvanized steel Height: 100mm Thickness: 0.6mm</p>	<p>38# MAIN CHANNEL Material: steel Surface treatment: galvanized steel Spec.: 38x12mm Length: 3000mm or on request Thickness: 0.8mm</p>	<p>38# MAIN CHANNEL HOIST Material: steel Surface treatment: galvanized steel Height: 95/105mm Thickness: 1.0mm</p>
<p>SPRING TEE RUNNER CONNECTOR Material: steel Surface treatment: galvanized steel Length: 60mm Thickness: 0.6mm</p>	<p>MAIN CHANNEL CONNECTOR Material: steel Surface treatment: galvanized steel Height: 41/53mm Thickness: 1.0mm</p>	<p>WINDPROOF L SHAPED WALL ANGLE Material: Aluminum alloy Surface treatment: Powder coating Spec.: 25x25mm Length: 3000mm or on request Thickness: 0.6mm or on request</p>	<p>U ANGLE Material: Aluminum alloy Surface treatment: Powder coating Spec.: 16x38x16mm Length: 3000mm or on request Thickness: 0.6mm or on request</p>	<p>BOLT Material: steel Surface treatment: galvanized steel Length: 1000mm or 3000mm on request Thickness: 6/8mm</p>