




FB SNAP IN CEILING TILE

Material: aluminum or galvanized steel
 Surface treatment: powder coating or pre-painted
 Thickness: 0.6-1.2mm
 Color: RAL color and wooden grain colors are available for choice
 Plain and perforated tile are optional, for perforated tiles with black felt, sound absorption, for more patterns please refer to P10-P12



FB SNAP IN CEILING TILE Unit:mm

Item No.	WidthXLength	Thickness	Height
FB01	300x300	0.6-0.9	25
FB02	400x400		
FB03	500x500		
FB04	300x600	0.6-1.1	28
FB05	600x600		
FB06	600x900	0.8-1.2	30
FB07	800x800		
FB08	300x1200		
FB09	600x1200		

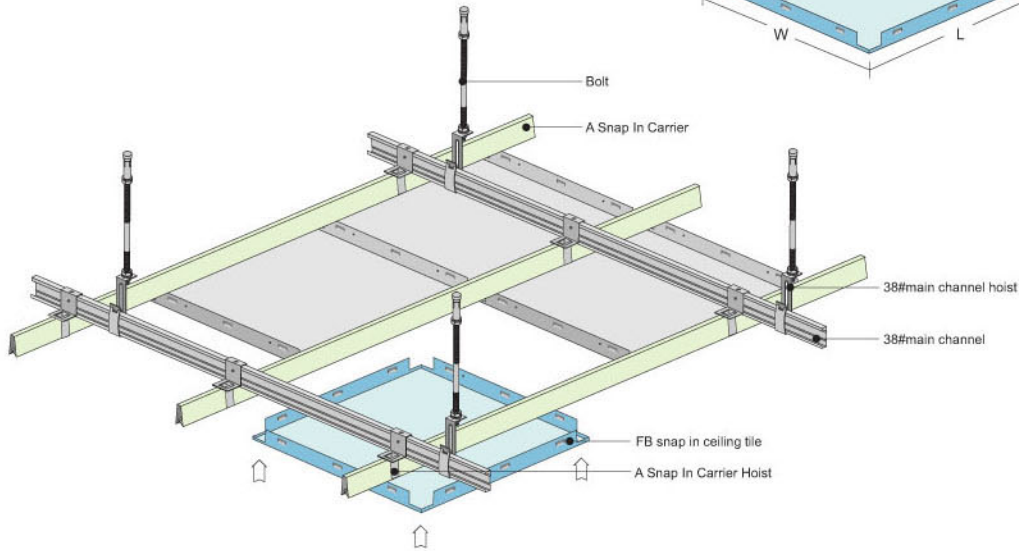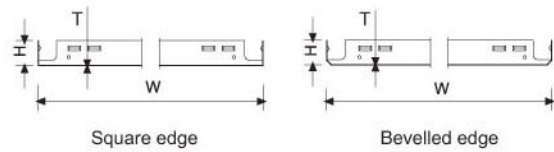

Structure and installation of FB snap in ceiling

<p>A SNAP IN CARRIER Material: steel Surface treatment: galvanized steel Height: 42mm Thickness: 1.0mm</p>	<p>A SNAP IN CARRIER HOIST Material: steel Surface treatment: galvanized steel Height: 42mm Thickness: 1.0mm</p>	<p>38# MAIN CHANNEL Material: steel Surface treatment: galvanized steel Spec.: 38x12mm Length: 3000mm or on request Thickness: 0.8mm</p>	<p>A SNAP IN CARRIER CONNECTOR Material: steel Surface treatment: galvanized steel Height: 42mm Thickness: 1.0mm</p>	<p>38# MAIN CHANNEL HOIST Material: steel Surface treatment: galvanized steel Height: 95/105mm Thickness: 1.0mm</p>
<p>BOLT Material: steel Surface treatment: galvanized steel Length: 1000mm or 3000mm on request Thickness: 6/8mm</p>	<p>MAIN CHANNEL CONNECTOR Material: steel Surface treatment: galvanized steel Height: 41/53mm Thickness: 1.0mm</p>	<p>U ANGLE Material: Aluminum alloy Surface treatment: Powder coating Spec.: 16x38x16mm Length: 3000mm or on request Thickness: 0.6mm or on request</p>	<p>WINDPROOF L SHAPED WALL ANGLE Material: Aluminum alloy Surface treatment: Powder coating Spec.: 25x25mm Length: 3000mm or on request Thickness: 0.6mm or on request</p>	<p>WINDPROOF W SHAPED WALL ANGLE Material: Aluminum alloy Surface treatment: Powder coating Spec.: 24x11x11x24mm Length: 3000mm or on request Thickness: 0.6mm or on request</p>